


# VisionRGB-E2

## Dual Channel RGB/DVI/HD Capture Card Advanced Graphics Display Technology

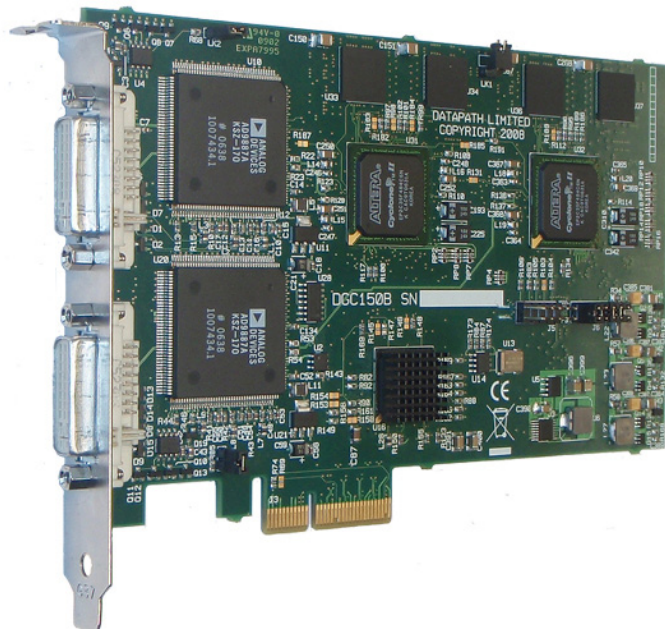

PCI Express

HD 1080p

HDMI 1080p

DVI - 1920x1200

RGB 2048x1536

### DESCRIPTION

The VisionRGB-E2 has two complete capture channels supporting up to 1920x1080 DVI or 2048x1536 Analog resolution.

The VisionRGB-E2 captures the Analog/DVI data and triple buffers it into onboard storage. This data is then copied using DMA to the host system for display, storage or streaming.

When a Datapath graphics card is used, the VisionRGB-E2 transfers the data directly to the graphics card thereby increasing performance. The VisionRGB-E2 sends the relevant portions of each captured image to each display channel and instructs each channel to use its graphics engine to render the data. This fully utilises the hardware and dramatically increases performance.

When the RGB/DVI data is displayed on a non Datapath graphics card, the VisionRGB-E2 sends the data to system memory or direct to the graphics card, dependant on the software used for display.

The VisionRGB-E2 is an ideal solution for applications that require the capture of Analog or DVI sources in real time. Typical applications include:

- Viewing Analog or DVI sources from PCs, MACs, Industrial/medical equipment, cameras and other video equipment
- Streaming video applications
- Video/Data Wall Controllers

## FEATURES

- Dual channel RGB/DVI/HD capture card (PCI-Express)
- Four Lane PCIe interface with a maximum data rate of 480MB/sec
- Maximum analog RGB capture resolution of 2048 x 1536 x 24bit
- Maximum DVI capture resolution of 1920 x 1200 x 24bit
- HD modes using the supplied DVI/ Component Adapter or DVI/HDMI Adapter (HDCP not supported)
- On card processor for real time mode and sync detection
- Support for multiple cards allowing up to 32 capture channels. (16 cards)
- Direct DMA driver software and streaming driver
- •High quality down scaling
- Support for YUV 4:2:2, RGB 5:5:5, 5:6:5 and 8:8:8 video formats
- High performance DMA to system memory or direct to graphics memory with scatter gather
- Support for separate H/V sync, Composite sync or Sync on Green
- 16 cropping windows per capture channel
- Includes WDM streaming drivers and the Datapath Vision application software
- Fully integrated with the Datapath Wall Control -red software for video wall applications.
- VisionRGB-E2 is also optimised for operation with the Datapath range of graphics cards
- Support for Windows® XP/Vista/Server 2003/ Server 2008/Windows® 7
- Datapath SDK included for software developers

## RGB STREAMING

For streaming applications, the VisionRGB-E2 can be used with Windows Media Encoder to compress and stream captured video. To replay the video, use Windows® Media Player.

Any application compatible with Windows® Direct-Show technology can use the VisionRGB-E2 due to its built-in WDM support.

## SOFTWARE

The VisionRGB-E2 is supplied with a powerful software application for configuring the timing and format of the input sources and displaying the data.

Simply connect your external DVI or Analog source into the card, run the VisionRGB-E2 application to automatically detect the video source format and display the captured video in a window on your desktop.

## MODELS AVAILABLE

Code	Description
VisionRGB-E2	Dual Channel Capture Card, PLUS 1 x DVI/VGA, 1 x DVI/component and 1 x DVI/HDMI adapters

All products are shipped with the latest software available, unless stated otherwise.

Special requirements may be organised by contacting our Sales team.

## SPECIFICATION

Board Format	PCI-e x4 half size plug-in card, 110mm x 170mm. PCI-e bus master with scatter gather DMA providing maximum data rate of 480MB/s.
Connectors	Two DVI-I type connectors.
Maximum Sample Rate	170Mpixels per second analog RGB or 165 MHz DVI. Analog modes up to 340MHz pixel clock can be captured using dual-pass sampling.
Video Sampling	RGB: 24 bits per pixel / 8-8-8 format.
Video Capture Memory	64 MB, triple buffered.
Analog RGB Mode Support	640x480, 800x600, 1024x768, 1280x1024, 1600x1200, 1920x1080, 2048x1536, custom modes.
DVI Single Link Mode Support	640 x 480, 800 x 600, 1024 x 768, 1280 x 1024, 1600 x 1200, 1920x1080, 1920 x 1200, and custom modes.
HD Modes	1080p,1080i, 720p, 576p, 576i, 480p and 480i using a Component-DVI connector (HDCP not supported).
Input Mode Detection	Automatic detection of input modes in hardware, enabling the tracking of mode changes in the source signal.
Pixel Transfer Formats	RGB: 5-5-5, 5-6-5 or 8-8-8 (24bit/32bit) pixels. YUV: 4:2:2. MONO: 8bit.
Update Rate	User defined, captured frame rate will match the source providing max data rate (480MB/s) is not exceeded. Multi-buffered to eliminate tearing artifacts.
Video Format Options	Analog RGB plus HSync and VSync (5 wire). Analog RGB with Composite Sync (4 wire). Analog RGB with Sync on Green/YPbPr (3 wire). DVI Single Link.
Operating System Support	Windows® XP, Windows® Vista, Windows® Server 2003, Windows® Server 2008 and Windows® 7.
Power Requirements	Max current at +3.3V – 0.25A. Max current at +12V – 1.2A. Max power – 15 Watts.
Operating Temperature	0 to 35 deg C / 32 to 96 deg F
Storage Temperature	-20 to 70 deg C / -4 to 158 deg F
Relative Humidity	5% to 90% non-condensing.
Warranty	3 years

*We are continuously developing the technology used within our product ranges delivering outstanding innovative solutions, therefore the specification may change from time to time.*

## MAIN SALES DEPARTMENT

Datapath Limited,  
Alfreton Road  
Derby, DE21 4AD  
England  
Tel: (+44) (0) 1332 294441  
Fax: (+44) (0) 1332 290667  
email: sales@datapath.co.uk  
Web: <http://www.datapath.co.uk>