


# Capture Card Selector

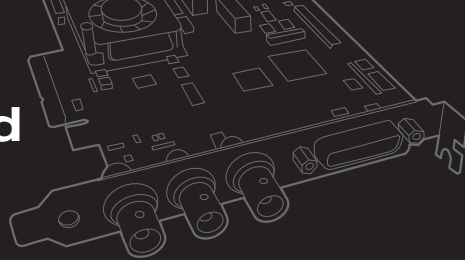

CAPTURE CARDS														NOT COMPATIBLE WITH VSN SYSTEMS		
VISIONSC RANGE			VISIONAV RANGE					VISION RANGE					VISIONLC RANGE			
DP2	SDI4	HD4+	F/H	B	HD	SDI	HD4	RGB-E1S	RGB-E2S	SD4+1S	SD8	SDI2	HD	HD2	SDI	
<b>INPUTS</b>																
TOTAL INPUTS	2	4	4	2	2	3	3	4	1	2	5	8	2	1	2	1
<b>MULTISTREAM CLIENTS</b>																
TOTAL CLIENTS	16	16	16	16	16	32	32	64	16	32	32	16	32	1	2	1
<b>4K / ULTRA HIGH DEFINITION</b>																
DISPLAYPORT 1.2	2															
HDMI 1.4			2											1	1	
TOTAL 4K/UHD	2	1*	2											1	1	
<b>HD INPUTS</b>																
RGB				1	1	2	1	4	1	2	1					
VGA				1	1	2	1	4	1	2	1					
DVI			4	1	1	2	1	4	1	2	1					
DVI-DL																
HDMI1.3				1	1	2	1	4	1**	2**	1**					
HDMI1.4 (in HD)			4											1	2	
Component				1	1	2	1	4	1	2	1					
HD-SDI		4					1					2				
3G-SDI		4					1					2				1
Total HD	2	4	4	1	1	2	2	4	1	2	1		2	1	2	1
<b>SD INPUTS</b>																
Composite				1	1	1	1				4	8				
S-Video											4	8				
SD-SDI							1					2				1
Total SD				1	1	1	1				4	8	2			1
<b>AUDIO INPUTS</b>																
DIGITAL****	2	4	4	1	1	2	2	4					2	1	2	1
XLR	OR			1	***	1	1							1	1	1
RCA				1	***	1	1							1	1	1
TOTAL AUDIO	2	4	4	2	1	3	3	4					2	1	2	1
<b>PROCESSING</b>																
TRANSFER RATE	6.4 GB/s	6.4 GB/s	6.4 GB/s	800 MB/s	800 MB/s	1.6 GB/s	1.6 GB/s	3.2 GB/s	650 MB/s	650 MB/s	650 MB/s	480 MB/s	650 MB/s	800 MB/s	1.6 GB/s	800 MB/s

\* 4K only available when input ganging

\*\* Requires DVI backwards compatibility of source

\*\*\* Audio module required

\*\*\*\* Digital audio embedded with the video in HDMI, SDI or DisplayPort